

PA-3622

> One-of-a-kind Highly Integrated Fanless 15.6" POS Terminal



Features



- Fanless design with Intel® Celeron® J1900 CPU
- 15.6" LED backlight panel with bezel-free capacitive touch
- Slim and versatile design for multiple applications
- MSR / i-Button / Fingerprint / VFD / Printer / wireless LAN (Optional)

Specifications



System	CPU Support	Intel® Celeron® J1900 CPU
	Memory	1 x DDR3L SO-DIMM slot (up to 8GB)
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	60~90 watt power adapter
	Audio	2W speaker
	System Weight	With power adapter approx. 5.5 kg
	Dimensions (W x H x D)	391 x 171 x 310 mm
	O.S. Support	Windows 10(64) / Windows 8.1(64) / POSReady 7
	Storage	SATA
I/O Ports	USB	Rear: 3 x USB 2.0 / 1 x USB 3.0 Side: 1 x USB 2.0
	Serial Ports	3 x RJ45 (all support +5V/+12V selectable) + 1 (optional) x DB9
	LAN	1 x RJ45
	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC In	1 x 4 pin DC power jack
Add-ons	Customer Display	VFD, 20 columns and 2 lines, each column is 5 x 7 dots
	Printer	2" or 3" easy loading thermal printer with auto-cutter
	MSR & iButton	JIS I or II, ISO Track1+2+3 (PS/2 interface)
	Fingerprint	8-bit grayscale reader
Display	LCD	15.6" TFT LCD
	Resolution	1366 x 768
	Brightness	220 cd/m ²
	Touchscreen	15.6" capacitive touch panel, USB interface (EETI controller)
	Tilt Angle	24~30 degrees
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0°C~5°C
	Storage Temp.	-5°C~60°C
	Humidity	20%~90%

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.


Applications

- Retail
- Food Service




Highlights



System I/O Ports

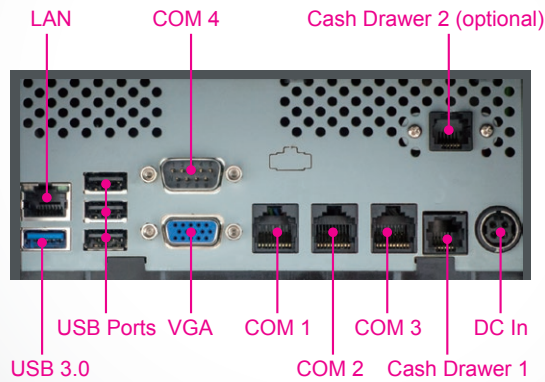

Dimensions

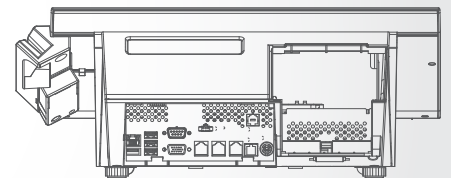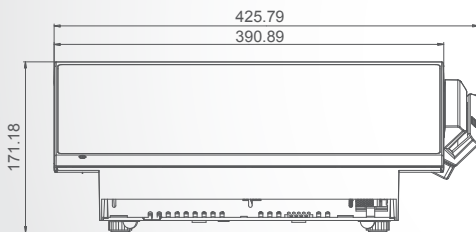

unit: mm